
INDESTRUCTIBLE Wall Protection...



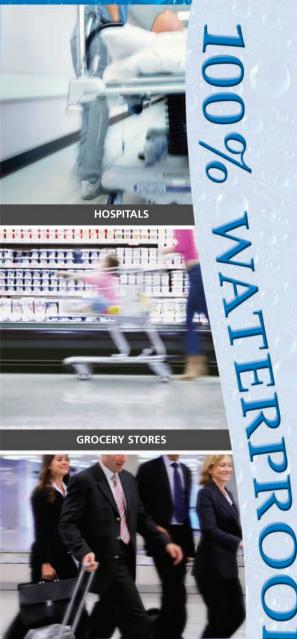

Other places to use the benefits of PLAS-TEX® Duro-Base -

- Retail Stores
- Shopping Centers
- Restaurants & Food Services
 School Hallways
- Public Restrooms
- Gyms & Locker Rooms
- Bus/Train/Subway Station

AIRPORTS

- Shipping & Receiving Areas
- Warehouses

Building Green

Saving Our World...

Excelling beyond Recycling & Reusing, Parkland Plastics was founded on the principles of Building Green. PLAS-TEX® is our proprietary technology for converting post-industrial scrap into USDA accepted American manufactured goods. It is the first and only plastic extruded sheet made from 100% recycled resins. Every time one of our satisfied customers purchases a piece of Duro-Base, they are saving about 10-lbs. of non-biodegradable plastic from landfills.





Features & Benefits

- Virtually Indestructible Long-lasting protection equals high cost-effectiveness
- 100% Waterproof –
 Non-absorbent: no swelling, rotting, or water discoloration
- Mold and Mildew Resistant Does not support fungal or bacterial growth
- Sanitary & Hygienic –
 Does not contribute to
 "sick"-building syndrome
- Chemically Inert –
 Not affected by acids, chemical solvents or petroleum products
- Color Goes All the Way Through Scratches don't show Makes for extended product life
- Class C Flame Spread Rating

Cost/Square-Foot

\$\$\$\$	Ceramic Tile
\$\$\$	Oak
\$\$	PLAS-TEX® Duro-Base
\$	Vinyl Cove Base

Value: Benefits per \$ Spent

#1	PLAS-TEX® Duro-Base
#2	Oak
#3	Ceramic Tile
#4	Vinyl Cove Base

	irually destrug	otects	sists M	fainten. Se	olor M. "Satility	ecorati, hancen	verage espan (
BASEBOARD	7.4	4.5	P. Z.	45	6%	En 0	Z,i
Vinyl Cove Base			•		•		1
Ceramic Tile				•		•	3
Wood/Lumber		•				•	3
PLAS-TEX® Duro-Base	•	•	•	•			8



Installation instructions:

- 1) Use circular saw, cut to desired length, join with scarf joint
- Apply Parkland Construction Adhesive to DuroBase back with trowel
- 3) Place flush on floor or plumb across wall bottom
- 4) Reinforce 1/2" & 5/8" DuroBase with screws by pre-drilling holes and counter-sinking into studs



BASE

Thicknesses: 3/8", 1/2", 5/8" Heights: 4", 5", 6", 10" Lengths: 8', 12'



CORNER GUARD Thickness: 1/2" Width: 3" Height: 4'



CHAIR RAIL Thickness: ⁵/8" Height: 3" Length: 8'

100% WATERPROOF
Parkland Plastics www.waterProofPanels.com

Maker of The Waterproof Panel





www.WaterProofPanels.com 800 835 4110 / Fax: 574 825 4438